

Optimus Post Top Power Selectable 60W/45W35W/25W + CCT


Product Name **Optimus Post Top Power Selectable 60W/45W35W/25W + CCT**
 Product SKU **ML-OPT-60W453525-CCT**



Application **Residential, Complexes, Parking Lots** *Pole Not Included*

Product Specification

Power	Power Selectable 60W / 45W / 35W / 25W
LEDs	TYF SMD3030 @ 180lm/w TBS-E302F-0202B8
Effective Lumen	60W - 10,300 lm 45W - 7730 lm 35W - 6300 lm 25W 4500 lm
Colour	CCT - 3000K / 4000K / 6500K
Colour Rendering Index	RA > 70
Unified Glare Rating	< 32
Beam Angle	110°
LM80	L90 @ 50,000 hours 25°C
Driver Brand	MSPI-NIS70W21S-XXXX, UL standard
Power Factor	0.95PF
Voltage Input	AC100-277V
Cable	H05 3*1mm ²
Input Frequency	50/60Hz
THD	<20%
Surge Protection	Driver with 2kV+ 10kV SPD
Operating Temperature	-20°C - 50°C
Dimmable	Yes, 0-10V
Warranty	5 Years
Impact Rating	IK08
Ingress Protection Rating	IP66
Main Materials	ADC12 Aluminium+Tempered Glass+Stainless Steel Screws and Bolts
Energy Efficiency Class	Class C in ErP 2.0
Certifications	IEC 60598-1 & -2 / UL-CA-2136807-0 / EMC / CE / ROHS
Dimension	460mm (D) * 193mm (H), Pole Hole Size 60mm (D) / 76mm Pole Adapter

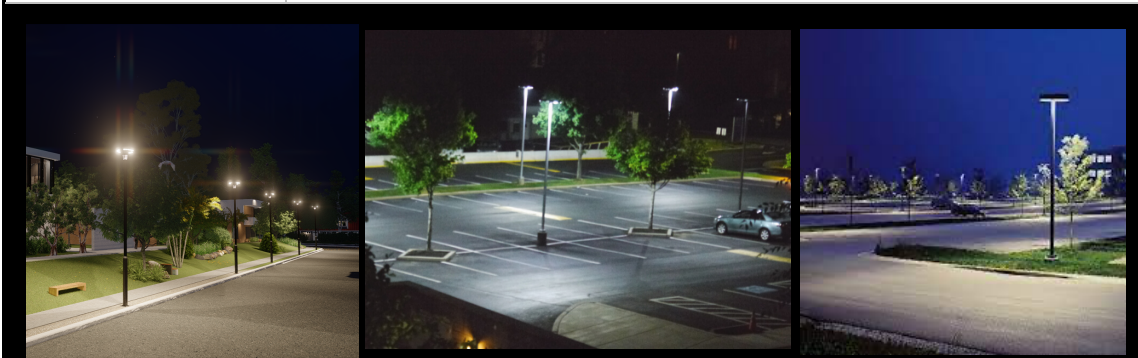

Comments..... Project.....
www.mezighting.com